


TS.11205 **DESIGNER RANGE** Slide Arm Closer

#DesignerDoorCloserthatLast

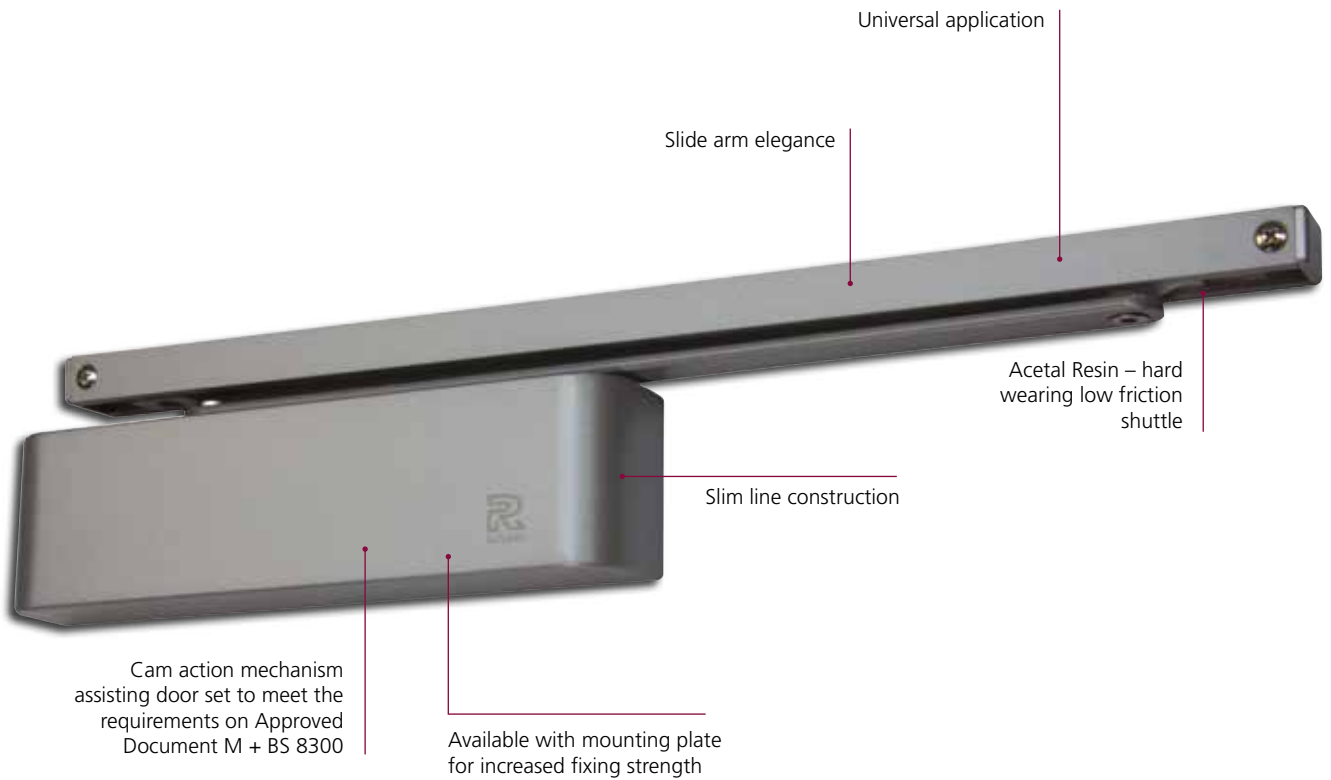

Product Overview

The Cam Action Door Closers, with their renown high efficiency and ease of opening, are what specifiers have come to learn and expect from Rutland door closers. Cam Actions have been used for decades in many and varied applications globally where the characteristics of the Cam, breed the performance, quality, reliability and design associated with Rutland.

- ✓ Easy to read instructions, saving over 12 minutes of fitting time
- ✓ Temperature stable hydraulic oil – used between -30°C - +60°C



Specification Overview



Fire Tested
up to 60 mins



Max Door Weight
up to 110kg



Opening Angle
120°



Max Door Width
1250mm



Universal
Application



Adjustable
Closing Speed



Power Size
EN2-5



Adjustable
Latch Speed



Guarantee



11205-CPR-44-
0316-17-01




Min Door
857mm fig30



Rut Lock

All dimensions shown are in mm.

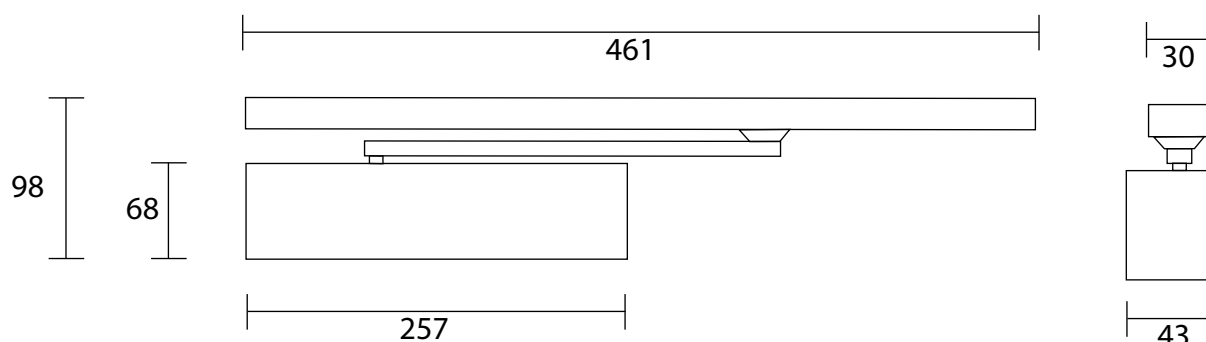

Technical Information

BS EN 1154 Classification

TS.11205 door closers have been independently tested to conform with the EN 1154 performance standard. They are CE marked and classified as follows:

3 8 $\frac{5}{2}$ 1 1 3

BS EN 1634 Fire Test

TS.11205 door closers have been tested to EN 1634 Fire Pressure Test for, 30 and 60 minutes on a TFTDoor and TFCDoor.

ADA Compliant

Fire doors shall have a minimum opening force allowable by the appropriate administration authority, and doors other than fire doors 5 pounds maximum opening force (22.2N) from push or pull side.

Options

- Mechanical hold open slide rail (*Not to be used on fire doors*)
- EN2
- Back check available as a cushion stop in the rail
Options not covered by CE.

Other Benefits

- BS8300 & ADA.cv door closer helping the less able (min door size 857mm)